
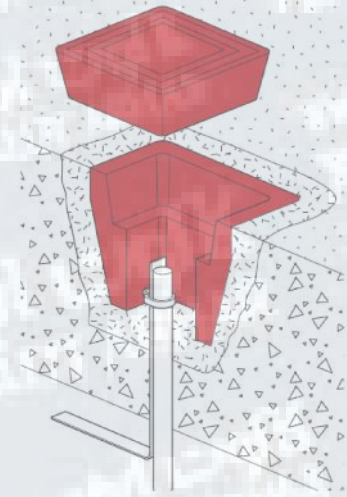


Concrete Earth Inspection Housing

The Kalot-Abhar concrete earth inspection housing is load rated to a minimum of 4,000 kilograms and is suitable for most industrial applications. The housing can have an internal earth bar fitted diagonally across in slots provided in the base.

L mm	W mm	H mm	Weight kg	Article Number
310	310	170	28	CEIH 3030
500	500	400	85	CEIH 5050

Material: Concrete

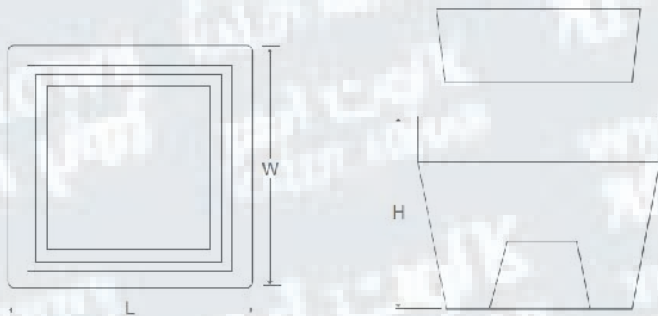

Earthing

Inspection Housing Earth Bars

These earth bars fit into the slots provided in the concrete inspection housings and are used when multiple connections to the earth rod are required. Other sizes and specifications including tin-plated versions are available upon request.

No. Holes	Hole Ø mm	L mm	W mm	H mm	Weight kg	Article Number
4	11	285	50	5	0.5	IHEB 04
5	11	285	50	5	0.5	IHEB 05
7	11	285	50	5	0.5	IHEB 07

Material: Solid Plain or Tin-Plated Copper

